

ARCHITECTURAL WRAPPING FILM


Create, renovate or transform your walls and furniture. Why replace when you can wrap with Cover Styl'.



14

1. 0

COVER STYL' DISTRIBUTION PARTNER

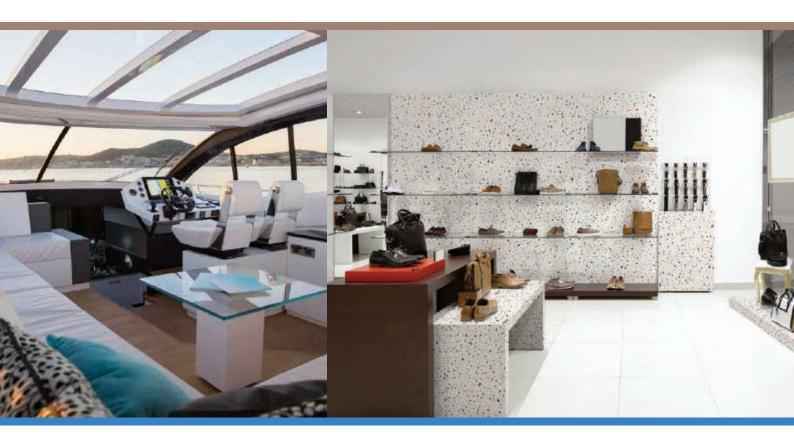


TECHNICAL INFORMATION

Cover Styl' stretchable architectural film is a printed film with adhesive consisting of 3 layers.

- 1. Embossed & printed film layer (vinyl-chloride plastic)
- 2. Simplified adhesive (acrylic)
- 3. Release paper


The diagram is a representative structure of Cover Styl' films. The actual structures and materials may be slightly different for each series.


EASY TO INSTALL WITH AIR RELEASE ADHESIVE



Cover Styl' is applied using an Acryil type adhesive, which has an adhesive surface with grid grooves for air-release between the film and the substrate. The air is released along these grooves, enabling the film to be quickly and easily affixed to large or complex surfaces.

This provides a higher quality finish. Facilitates the release of air when the film is affixed, enabling easy application to large or complex surfaces.

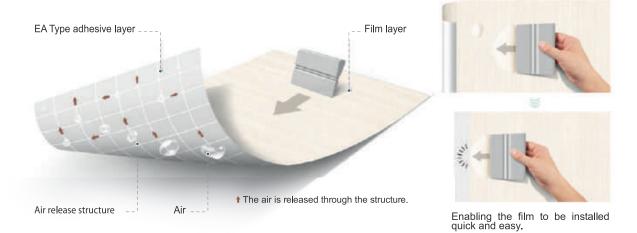

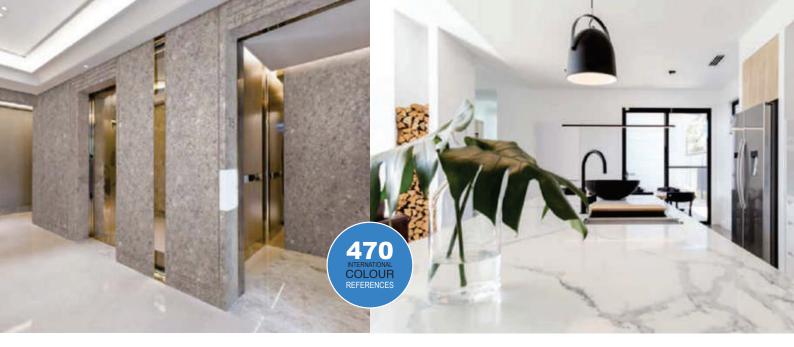

INTRODUCTION

Cover Styl' is a range of indoor Architectural wrapping films designed to realistically recreate the look of natural more expensive construction materials, like for example marble, wood or metals. Instead of replacing furniture or repainting surfaces, why not upgrade the look of your décor with unique, quality finishes. A Cover Styl' refurb is cost effective and there is no major construction disruptions and messy installations.

This architectural film can be heat formed and used on a variety of surfaces and is supplied in nine different ranges, consisting of different styles, textures, thicknesses and adhesives types. The Cover Styl' adhesive solution provides excellent tack, with bubble-free rendering and resistance to heat and humidity. Cover Styl' films also has hard wearing and durable finishes with a 10-year guarantee against delamination, crackling, yellowing and other changes in appearance.

Depending on the manufacturing process, some films are Calendered, Polymeric and some are Cast films, with a 3-5 layer process depending on the texture, most of which are thermoformable.

Thickness ranges from 200 – 350 micron. Cover Styl' is a self-adhesive vinyl and has air release technology to speed up application. There is also a grid pattern and meterage printed on the back of the liner to make on site measuring and cutting easier and quicker.

DELIVERY PROGRAMME DETAILS

Standard stock rolls are 50m x 1220mm and will be sold in 5m increments from Maizey Plastics branches and via our Online Store.

There are 470 Plus references available in 9 main categories, namely: Solid colours, Wood, Marble, Natural Stone, Fabric, Leather, Glitter, Soft Touch and Metallic.

It is important to note the difference between the red and green references. In the Cover Styl' catalogue you will see a green tick \checkmark or a red clock ().

- For Green References NOT in stock, the minimum order quantity is 10m and delivery time ranges from 7 – 12 days.
- For Red references the minimum order quantity is one roll and delivery ranges from 4 – 5 weeks. Delivery time can be expedited to 2 – 3 weeks with an additional fee will apply. In some cases, there are Red references in stock, so please enquire, you may be in luck.
- Custom colours can be ordered minimum qty 30 rolls.




WHERE TO USE COVER STYL'

Suitable for application onto walls, ceilings, furniture, doors, elevators, cupboards, counters, etc. Hotels and Guest Houses, Retail Environments, Banking Institutions, Corporate Offices, Hospitals, Transport Interiors, Leisure and Boating, Residential Homes, Exhibitions, Property Developers, Kitchen Manufacturers and many more...

RECOMMENDED SUBSTRATES	SUBSTRATE TYPES NOT RECOMMENDED
Plaster Board	Brick Walls
Melamine	Raw Fibreglass
Formica	Existing Wallpaper
Rhinolite	Damaged Chipboard
Painted Walls	Vehicles
Glass	Fabrics
Metals	Wet Paint
Plastics	Cracked Walls
Raw Wood	Rough Tiles
Ceiling Board	Damp Areas
Aluminium	Damaged Tiles
Granite	Rough Plaster
Tiles	Rust
Smooth Concrete	Textured Paints





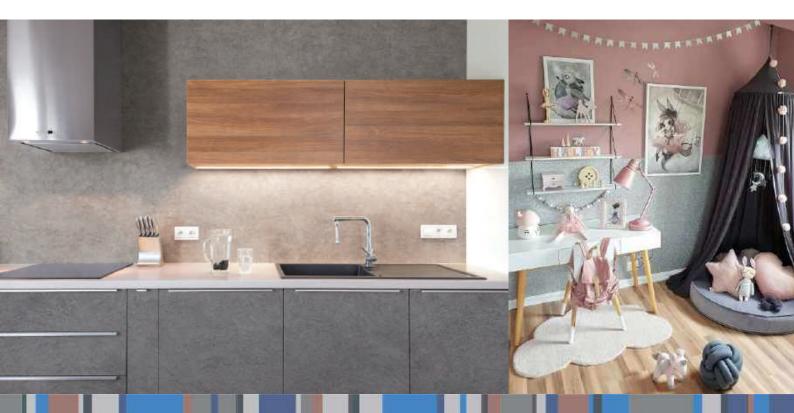

JOIN OUR TRAINING PROGRAMME AND GET CERTIFIED



Join our network of certified installers and qualify for preferential installer pricing through the Maizey Plastics distribution channel. Benefits include latest industry news, access to marketing material and the Cover Styl South Africa Innovation Centre in Johannesburg.

Enquiries can be directed to architectural@maizey.co.za

QUICK APPLICATION TIPS

When wrapping hard surfaces like melamine kitchen cupboards and doors, we recommend using a solvent based adhesion promoter for the edges and a water-based primer for the large surfaces, like raw Supawood or Rhinolite.

It is advisable to perform an adhesion test first. Test kits are available from Maizey Plastics. (Acceptable adhesion is 300 grams per square inch for your test strip)

Give flat surfaces a light sand and then fill any scratches, gouges or holes. This can be done with any wood filler or automotive body filler. In the event that there is no edging and the chipboard is damaged, body filler works very well.


The surface would then need to be wiped down with an ISO Propyl alcohol mix (70% ISO and 30% water) and primed before starting with application of the film.

When preparing plastered walls, a solvent based primer should be used, NOT a water-based primer. The same goes for dry walling.



It is still advisable to do an adhesion test first and then apply our recommended adhesion promoters on top of this.

Cover Styl' has a hard wearing and durable finish with 10 year guarantee against delamination, crackling, yellowing and other changes in appearance. An installation warranty will only be supported for certified Cover Styl' installers.

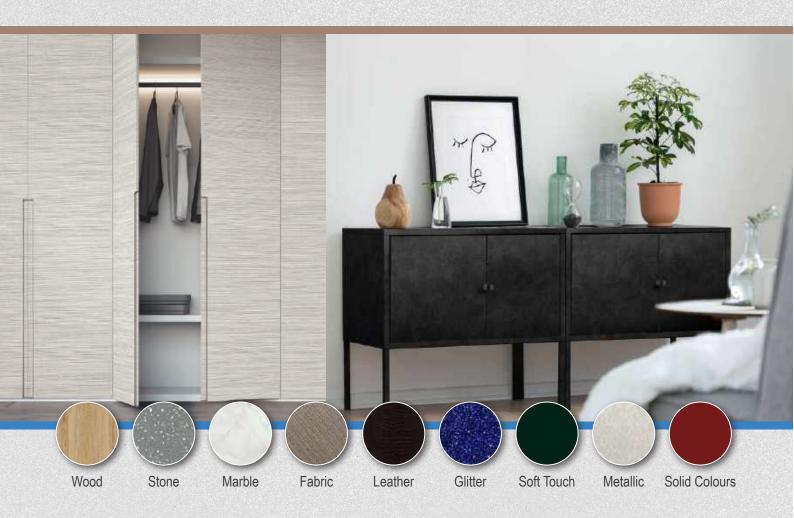







NATIONAL DISTRIBUTION 🕲 086 1100 420 🔄 architectural@maizey.co.za 🌐 www.maizey.co.za 📵 Shop online www.maizeyonline.co.za 👔 Get social @ Maizey.Plastics 🧕

Revised: March 2021